


# TCP/IP Lantronix Wiring - rs485 operation

## 5 pin DIN External

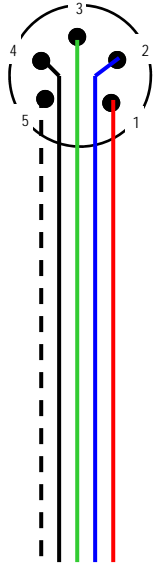


Display supplied without power output, omit pins 12 and GRD

## 5 pin DIN Internal




**Std 5 pin plug**  
 1 - +ve 5v (white)  
 2 - TX (Green)  
 3 - RX (Red)  
 4 - Neg (Black)  
 5 - GND (Blue)

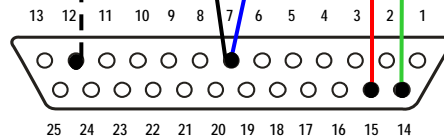

**25 Pin Connector**  
 14 - TX (Green)  
 15 - RX (Red)  
 7 - GND & Neg (Blue & Black)  
 12 - 5v (White)

## RJ45

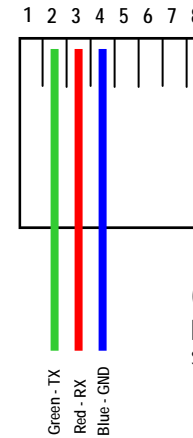

(not used for power, power supply separately)

SINGLE LINE DISPLAYS

BI - LINE DISPLAYS

MULTI LINE DISPLAYS